


# leitech

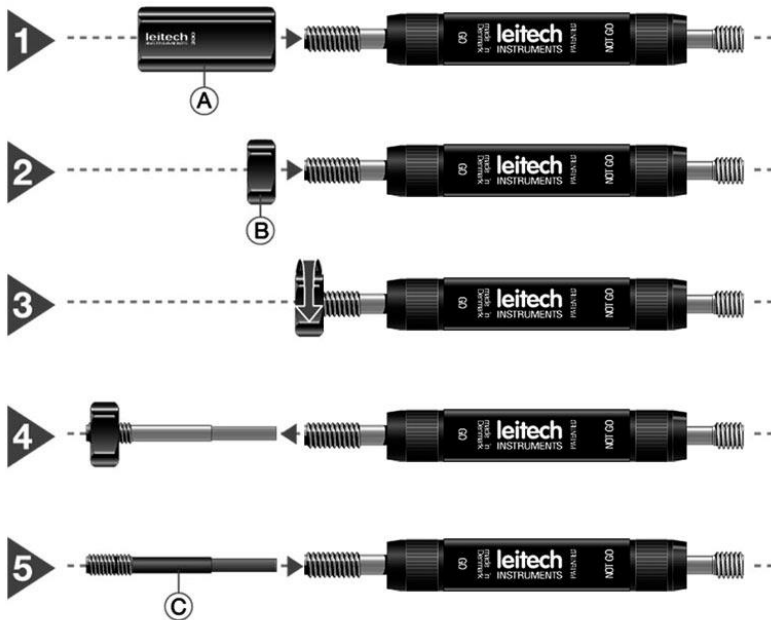

## Traditional Gauge

Follow points 1-5.

At point 5 the GO insert is fitted into position with the use of a plastic hammer.

### Replacement of inserts

*A new gauge in approx. 2 min.!*

1. Slide the Member Removal Sleeve over the gauge member to be replaced (Green/Go & Red/Not Go).
2. Thread the nut on to the gauge member.
3. Tighten the nut against the Member Removal Sleeve.
4. Wrench the gauge member from the handle.
5. Insert the new gauge member. Tap against a soft surface to seat the gauge member into the handle.

It is so simple – a new gauge – quickly and inexpensively

- |  |
|--|
| A. 1 Removal sleeve                    |
| B. 1 nut                               |
| C. 1 interchangeable LEITECH GO insert |